

<u>1</u>



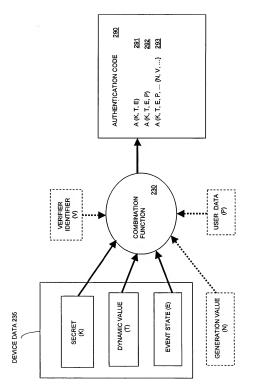


FIG. 2

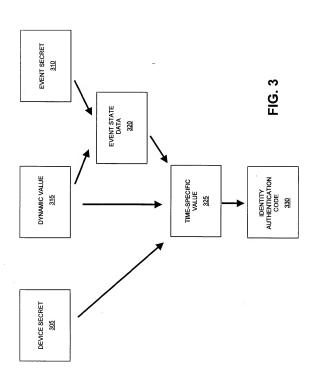


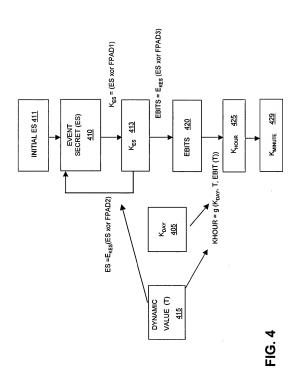

1-							
COLUMN 4 OUTPUT			ID AUTH CODE (A <sub>2</sub> B <sub>2</sub> )		1	-	ID AUTH CODE (A <sub>4,</sub> B <sub>5</sub> )
COLUMN 3 ACTION	1	TIME	PIN ENTRY	TIME	EVENT REGISTERED	TIME	PIN ENTRY
COLUMN 2 EVENT STATE DATA	Initial - B <sub>1</sub>	B <sub>2</sub>	B <sub>2</sub>	Вз	B <sub>4</sub>	B <sub>5</sub>	B <sub>5</sub>
COLUMN 1 DEVICE SECRET	Initial - A₁	A <sub>2</sub>	A <sub>2</sub>	A <sub>3</sub>	A <sub>3</sub>	Ą	¥
	Ļ	$T_2$	T <sub>3</sub>	<b>T</b>	T <sub>e</sub>	°L	Т,

FIG.5

FIG. 6



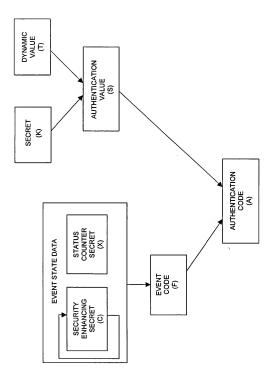


FIG. 7

